







报告编号

Lithium Battery UN38.3 Test Report 锂电池 UN38.3 测试报告

Client Name

Foshan Gulineng Power Technology Co., Ltd

委托单位

佛山市谷力能动力科技有限公司

Address

地址

HeTai South Road, HeGui Industrial Park Area A, HeShun,

Nanhai District, Foshan City, Guangdong, P.R.China

佛山市南海区里水镇和桂工业区A区和泰南路

Product Name

Lithium iron phosphate battery 磷酸铁锂电池

产品名称

Date Mar. 31, 2021

日期 2021年03月31日

Shenzhen Anbotek Compliance Laboratory Limited 深圳安博检测股份有限公司



报告编号

Page 2 of 16 第 2 页 共 16 页

1. SAMPLE DESCRIPTION 样品描述:

| Sample Name: 样品名称 | Pr Dz | Lithium iron phosphate battery 磷酸铁锂电池 | | | Sample Mo 样品型号 | del: | GLN-LFP62 161,5Ah | 28082- | |
|-------------------------------|-------------------|---------------------------------------|---|------|-------------------|-------------|--------------------------|-----------|--|
| Manufacturer: 制造商 | otel ^k | | Foshan Gulineng Power Technology Co., Ltd 佛山市谷力能动力科技有限公司 | | | | | | |
| Address of manufact 制造商地址 | turer: | Dist | HeTai South Road, HeGui Industrial Park Area A, HeShun, Nanhai District, Foshan City, Guangdong, P.R.China 佛山市南海区里水镇和桂工业区 A 区和泰南路 | | | | | | |
| Factory: | k. | | Foshan Gulineng Power Technology Co., Ltd 佛山市谷力能动力科技有限公司 | | | | | | |
| Address of factory: 工厂地址 | nbotek nbote | Dist | fai South Road, HeGu rict, Foshan City, Gua 市南海区里水镇和桂〕 | ngdo | ng, P.R.Chin | а | HeShun, Na | nhai | |
| Nominal Voltage: 标称电压 | 3.2V | otali. | Rated Capacity: 额定容量 | 10.0 | .5Ah .8Wh | Trade 商标 | emark: | / Anbotek | |
| Charge Current: 充电电流 | 32.3A | ant | Maximum Continuous Charge Current: 最大持续充电电流 | 100 | A anbotek | Curre | Charge ent: 載止电流 | 8.075A | |
| Cut-off Voltage: 终止电压 | 2.5V | nbore | Maximum Continuous Discharge Current: 最大持续放电电流 | 100 | A Arrive | Volta | ed Charge ge: 限制电压 | 3.65V | |
| Date of Sample Rece 样品接收日期 | eived: | | : 12, 2021 1年03月12日 | PZ | boton Ar | Pripote | ir Vilpor | otal Anbo | |
| Date of Test: 检测日期 | Anbolek | | : 12, 2021 to Mar. 24, 1年03月12日至 20 | | F03月24日 | PUL | Tupolok br. | ambatek. | |

Tested by: 检测 国文献

Checked by: 付意美

批准

Approved by:

不多学





 Report No.: 18270BC10066201
 Page 3 of 16

 报告编号
 第 3 页 共 16 页

2. REFERENCE METHOD 参考方法

United Nations Recommendations On The Transport Of Dangerous Goods, Manual Of Tests And Criteria (ST/SG/AC.10/11/Rev.7)

《联合国关于危险货物运输的建议书—试验和标准手册》 (ST/SG/AC.10/11/Rev.7)

3. EQUIPMENT LIST 设备清单

| Name of equipment /Model 设备名称/型号 Low Pressure Test Machine | Serial No. 编号 | Due Date 校准有效期 |
|--|------------------|-------------------|
| Low Pressure Test Machine 模拟高空低压试验箱 | | |
| 模拟高空低压试验箱 | SE-132 | 2022-03-11 |
| BE-DY-125 | | |
| High Fast Temperature&Humidity Chamber 快速温变箱 | | |
| 快速温变箱 | SE-1488 | 2021-08-09 |
| 快速温受相 ZJ-KSWB1506 Vibration Machine | | |
| Vibration Machine 振动台 | | |
| - 提売台 | SE-439 | 2021-09-27 |
| | | |
| Shock Machine | | |
| 机械冲击台 | SE-440 | 2022-03-12 |
| HSKT-10 | SE-440 | |
| High Temperature Short Circuit Test Chamber | | |
| 高温短路试验箱 KY-CS50 | SE-4071 | 2021-06-15 |
| KY-CS50 | | |
| • FI + (1) A 1 1 A 1 1 A 1 1 A 1 1 A 1 1 A 1 1 A 1 1 A 1 1 A 1 | | |
| Krush Testing Machine 挤压试验机 | SE-135 | 2021-07-12 |
| BE-6045 | | |
| Battery Charge And Discharge System 电池充放电系统 | | |
| 电池允放电系统 电池分子 电电子 电电子 电电子 电电子 电电子 电电子 电电子 电电子 电电子 电 | SE-4087 | 2021-08-09 |
| | | |
| DC Power Supply 直流电源 | or Anbor | |
| 直流电源 | SE-1332 | 2021-11-01 |
| 直流电源 QJ3020E Electronic loading 由子允裁 | | |
| Electronic loading | | |
| 电子负载 JT6111 | SE-1561 | 2021-12-08 |
| NOTOTI AIN | | |
| THOSE TWO MAINTENS | | |
| 日八月用衣 | SE-511 | 2022-03-11 |
| MS8040 | | |
| High-precision Electronic Counting Balance 高精度电子计数天平 | | |
| 高 宿 没 电 士 计 级 大 十 | SE-1483 | 2021-07-12 |
| | | |
| | botek D | upo. |
| 温升记录仪 340704 | SE-004 | 2022-03-11 |
| 温升记录仪 34970A | | |





 Report No.: 18270BC10066201
 Page 4 of 16

 报告编号
 第 4 页 共 16 页

4. ENVIRONMENTAL CONDITIONS OF THE TEST 环境条件

Temperature: (20±5) °C R.H.: (25~75) %RH

温度 相对湿度

5. TEST ITEM AND CONCLUSION 测试项目及结论

| ITEM 测试项目 | SAMPLE NUMBER 样品编号 | STANDARD 执行标准 | CONCLUSION 结论 |
|-----------------------------|-----------------------|---------------------|------------------|
| Altitude simulation 高度模拟 | C1~C5, C6~C10 | W Aupon | PASS 通过 |
| Thermal test 热测试 | k kotek Ant | otek Aupo, Au | PASS 通过 |
| Vibration 振动 | Y And | Inpotek Aupo, | PASS 通过 |
| Shock 冲击 | poten And | ST/SG/AC.10/11/Rev. | PASS 通过 |
| External short circuit 外部短路 | Anbotek Anbe | Anborek 7 Anbore | PASS 通过 |
| Crush 挤压 | C11~C15, C16~C20 | k Anborek Anbore | PASS 通过 |
| Overcharge 过度充电 | N.A. nbotel | tek hotek Anb | N.A. |
| Forced discharge 强制放电 | C21~C30, C31~C40 | tek abotek | PASS 通过 |

Notes 说明:

C1~C5: Cells at first cycle in fully charged states;

为第1个充放电周期完全充电状态的电芯;

C6~C10: Cells after 25 cycles ending in fully charged states;

为第25个充放电周期后完全充电状态的电芯;

C11~C15: Cells at first cycle at 50% of the design rated capacity;

为第1个充放电周期50%设计额定容量状态的电芯;

C16~C20: Cells at 25 cycle at 50% of the design rated capacity;


为第25个充放电周期50%设计额定容量状态的电芯;

C21~C30: Cells at first cycle in fully discharged states;

为第1个充放电周期完全放电状态的电芯;

C31~C40: Cells after 25 cycles ending in fully discharged states;

为第25个充放电周期后完全放电状态的电芯;





报告编号

Page 5 of 16 第 5 页 共 16 页

6. TEST METHOD 测试方法

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries. In order to quantify the mass loss, the following procedure is provided:

Mass loss(%) = $(M_1-M_2) / M_1 \times 100$

Where M₁ is the mass before the test and M₂ is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as "no mass loss".

小型电芯或电池必须按顺序进行试验 T.1 至 T.5。试验 T.6 和 T.8 应使用未另外试验过的电芯或电池。试 验 T.7 可以使用原先在试验 T.1 至 T.5 中使用过的未损坏电池进行,以便测试交替充电放电过的电池。

质量损失依照下式计算:

质量损失(%)= (M₁-M₂)/M₁ *100

式中 M₁ 是实验前的质量,M₂ 是试验后的质量。如质量损失不超过下表所列数值,即视为"无质

| 100 | |
|--|---------------------------|
| Mass M of cell or battery 电芯或电池质量 M | Mass loss limit 质量损失限值 |
| M<1g | 0.5% |
| 1g≤M≤75g | 0.2% |
| M>75g | 0.1% |

T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature (20 ± 5 °C).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.1 高度模拟

试验电芯和电池应在压力等于或低于 11.6 千帕和环境温度为(20°±5°C) 下存放至少 6 小时。 要求电芯和电池无渗漏、无排气、无解体、无破裂、无起火,并且每个试验电芯或电池在试验 后的开路电压不小于其在进行这一实验前电压的90%。有关电压的要求不适用于完全放电状态的试验电 芯和电池。

T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to 72 ± 2°C, followed by storage for at least six hours at a test temperature equal to - 40 ± 2°C. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambie nt temperature (20 ± 5°C). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2 热测试

试验电芯和电池应先在试验温度等于 72±2°C 的条件下存放至少 6 小时,接着再在试验温度等 于-40±2°C 的条件下存放至少 6 小时。两个极端试验温度之间的最大时间间隔为 30 分钟。此程序重复进 行,完成 10 次,接着将所有试验电芯和电池在环境温度(20±5°C)下存放 24 小时。对于大型电芯和电 池,暴露于极端试验温度的时间至少应为12小时。

Shenzhen Anbotek Compliance Laboratory Limited

Hotline 400-003-0500 www.anbotek.com



报告编号

Page 6 of 16 第 6 页 共 16 页

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在试验 后的开路电压不小于其在进行这一试验前电压的90%。有关电压的要求不适用于完全放电状态的试验电 芯和电池。

T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face. The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1 g_n is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8 gn occurs (approximately 50 Hz). A peak acceleration of 8 gn is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2 gn occurs (approximately 25 Hz). A peak acceleration of 2 gn is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

电芯和电池紧固于振动机平台,但紧固程度不能造成电芯变形以致不能准确传递振动。振动应 是正弦波形,对数频率扫描从7赫兹和200赫兹,再回到7赫兹,跨度为15分钟。这一振动过程须对 三个相互垂直的电芯安装方位的每一方向重复进行 12次,共为时 3小时。其中一个振动方向必须与端面 垂直。

作对数式频率扫描,对总质量不足 12 千克的电芯和电池(电芯和小型电池),和对 12 千克及 更大的电池(大型电池)有所不同。

对电芯和小型电池:从7赫兹开始,保持1gn的最大加速度,直到频率达到18赫兹。然后将振 幅保持在 0.8 毫米(总位移 1.6 毫米),并增加频率直到最大加速度达到 8 gn(频率约为 50 赫兹)。将 最大加速度保持在8gn直到频率增加到200赫兹。

对大型电池:从7赫兹开始,保持1gn的最大加速度,直到频率达到18赫兹。然后将振幅保持 在 0.8 毫米(总行程 1.6 毫米)并增加频率直到最大加速度达到 2 gn (频率约为 25 赫兹)。将最大加速 度保持在2gn直到频率增加到200赫兹。

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在第三 个垂直安装方位上的试验后立即测得的开路电压不小于在进行这一试验前电压的90%。有关电压的要求 不适用于完全放电状态的试验电芯和电池。

T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g_n and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 q_n and pulse duration of 11 milliseconds.

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

Shenzhen Anbotek Compliance Laboratory Limited

Hotline 400-003-0500



报告编号

Page 7 of 16 第 7 页 共 16 页

| Battery 电池 | Minimum peak acceleration 最小峰值加速度 | Pulse duration 脉冲持续时间 |
|--------------------------|--|--------------------------|
| otek Anborett Anbe | 150 g₁ or result of formula | Anborer Anbo |
| Small batteries 小型电池 | Acceleration(g _n)= $\sqrt{\left(\frac{100850}{\text{mass}*}\right)}$ | 6 ms |
| Anbore An atek | whichever is smaller | born VIII. |
| ek abotek Anbo | 50 g₁ or result of formula | anborek Anbo |
| Large batteries 大型电池 | Acceleration(g _n)= $\sqrt{\left(\frac{30000}{\text{mass}*}\right)}$ | Anborek 11 ms Anborek |
| Auguster Auguster upotel | whichever is smaller | Ant tek subot |

^{*} Mass is expressed in kilograms.

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.4 冲击

试验电芯和电池用坚固支架紧固在试验机上,支架支撑着每个试验电池的所有安装面。

每个电芯须经受最大加速度 150 gn 和脉冲持续时间 6 毫秒的半正弦波冲击。不过,大型电芯需 须经受最大加速度 50 gn和脉冲持续时间 11 毫秒的半正弦波冲击。

每个电芯须经受半正弦波冲击的峰值加速度取决于电池的质量。对小型电池的脉冲持续时间为6 对大型电池的脉冲持续时间为11毫秒。上面的公式用于计算合适的最低限度最大加速度。

每个电芯或电池须在三个相互垂直的电芯或电池安装方位的正极方向经受三次冲击,接着在负 极方向经受三次冲击,总共经受 18 次冲击。

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在试验 后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电 芯和电池。

T.5 External short circuit

The cell or battery to be tested shall be shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of 57±4°C, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at 57±4°C shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4°C, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. The short circuit and cooling down phases shall be conducted at least at ambient temperature. Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test.

T.5 外部短路 对于待试电芯或电池,应加温一段必要的时间,使从外壳测量的温度达到均匀的稳定温度 57±4°C,这段时间的长短取决于电芯或电池的大小和设计,对于这个持续时间应加以评估和记录。如无 法进行这种评估,则小型电芯或电池的暴露时间应至少持续6小时,大型电芯或电池的暴露时间应至少 持续 12 小时。然后, 电芯或电池在 57±4℃ 下经受总外电阻小于 0.1 欧姆的短路条件。

Shenzhen Anbotek Compliance Laboratory Limited

Hotline





报告编号

Page 8 of 16 第 8 页 共 16 页

这一短路条件应在电芯或电池外壳温度回到 57±4℃ 后持续至少 1 小时, 外壳温度降幅达试验中所观察的最高温升幅的二分之一并保持低于此温度值。

短路和降温阶段应至少相当于环境温度。

要求电芯和电池外壳温度不超过 170°C, 并且在试验过程中及试验后6小时内无解体,无破 裂,无起火。

T.6 Impact / Crush

Impact (applicable to cylindrical cells greater than 18 mm in diameter)

The sample cell or component cell is to be placed on a flat smooth surface. A 15.8 ± 0.1mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A 9.1 ± 0.1 kg mass is to be dropped from a height of 61 ± 2.5 cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8 ± 0.1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells not more than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches 13 ± 0.78 kN;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170°C and there is no disassembly and no fire during the test and within six hours after this test. T.6 撞击/挤压

撞击 (适用于直径不小于 18 毫米的圆柱形电芯)

试样电芯或组成电芯放在平坦光滑的表面上,一根 316 型不锈钢棒横放在试样中心,钢棒直径 15.8 ± 0.1 毫米,长度至少 6 厘米,或电芯最长端的尺度,取二者之长者。将一块 9.1± 0.1 千克的重锤 从 61 ± 2.5 厘米高处跌落到钢棒和试样交叉处,使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直 轨道或管道加以控制。垂直轨道或管道用于引导落锤沿水平支撑表面呈90度落下。

接受撞击的试样,纵轴应与平坦表面平行并与横放在试样中心的直径 15.8 ± 0.1 毫米弯曲表面 的纵轴垂直。每一试样只经受一次撞击。

挤压(棱柱形、袋装、硬币/纽扣电芯和直径小于18毫米的圆柱形电芯)

将电芯或组成电芯放在两个平面之间挤压,挤压力度逐渐加大,在第一个接触点上的速度大约 为 1.5 厘米/秒。挤压持续进行,直到出现以下三种情况之一:

- 施加的力量达到 13 ± 0.78 千牛顿; (a)
- 电芯的电压下降至少 100 毫伏;或
- 电芯变形达到原始厚度的50%或以上。
- 一旦达到最大压力、电压下降 100 毫伏或更多,或电芯变形至少达原厚度的 50%, 力。

Hotline

Code: AB-BAT-104-a

400-003-0500 www.anbotek.com



报告编号 第 9 页 共 16 页

棱柱形或袋装电芯应从最宽的一面施压。纽扣/硬币形电芯应从其平坦表面施压。圆柱形电芯应从与纵轴 垂直的方向施压。

每个试样电芯或组成电芯只做一次挤压试验。试样应继续观察 6 小时。试验应使用之间未做过其他试验的电芯或组成电芯进行。

要求电芯或组成电芯外壳温度不超过 170°C, 并且在试验过程中及试验后 6 小时内无解体,无起火。

T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

- (a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.
- (b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours. Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.7 过度充电

充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下:

- (a)制造商建议的充电电压不大于 18 伏时,试验的最小电压应是电池最大充电电压的两倍或 22 伏两者中的较小者;
 - (b)制造商建议的充电电压大于 18 伏时,试验的最小电压应为最大充电电压的 1.2 倍。试验应在环境温度下进行,进行试验的时间应为 24 小时。要求可充电电池在试验过程中和试验后 7 天内无解体,无起火。

T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

T.8 强制放电

每个电芯应在环境温度下与 12 伏直流电源串联在起始电流等于制造商给定的最大放电电流的条件下强制放电。

将适当大小和额定值的电阻负荷与试验电池串联,计算得出给定的放电电流。对每个电池进行强制放电,放电时间(小时)应等于其额定容量除以初始试验电流(安培)。

要求原电芯或可充电电芯在试验过程中和试验后7天内无解体,无起火。

Code: AB-BAT-104-a

Page 9 of 16






报告编号

Page 10 of 16 第 10 页 共 16 页

7. TEST PROCEDURE 测试程序

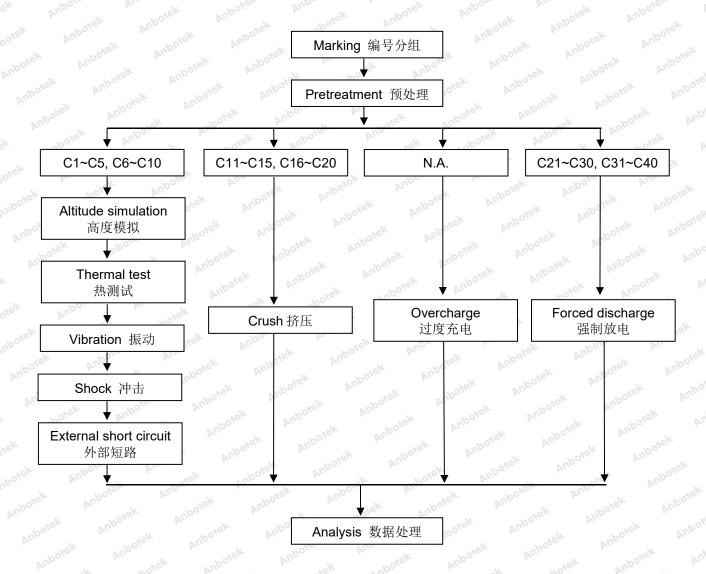



报告编号

Page 11 of 16 第 11 页 共 16 页


8. DATA 测试数据

T.1 Altitude simulation 高度模拟

| Anb No. | Pre-test | 测试前 | After tes | t 测试后 | Mass | Voltage | Whether leakage, |
|----------|----------|---------|-----------|---------|-------|---------|---------------------|
| 编号 | Mass | Voltage | Mass | Voltage | loss | loss | venting, |
| Arr | 质量。 | 电压 | 质量 | 电压 | 质量亏损 | 电压亏损 | disassembly, |
| Auporo | 克(g) | 伏(V) | 克(g) | 伏(V) | (%) | (%) | rupture, fire (Y/N) |
| -V- V- | rek Ar | 00, | -tek | anbote | | -V 50 | 有无渗漏,排气,解 |
| VE. VUE | | hotek | Aupo. | A. Ore | k nbo | V. Vue | 体,破裂和起火(是 |
| wek a | upore. | AUR | hotek | Anbo. | P. | rek . | /否) |
| C1 | 3050.72 | 3.431 | 3050.72 | 3.431 | 0.00 | 0.00 | otek N Anbore |
| C2 | 3046.51 | 3.420 | 3046.35 | 3.419 | 0.01 | 0.03 | Anto N ate |
| C3 | 3048.68 | 3.423 | 3048.68 | 3.423 | 0.00 | 0.00 | wooden And |
| C4 | 3048.37 | 3.416 | 3048.37 | 3.416 | 0.00 | 0.00 | Nr op |
| C5 | 3047.15 | 3.422 | 3047.15 | 3.422 | 0.00 | 0.00 | E AUPON BU |
| C6 | 3048.16 | 3.432 | 3048.16 | 3.432 | 0.00 | 0.00 | r Notek B |
| K C7 000 | 3049.44 | 3.419 | 3049.44 | 3.418 | 0.00 | × 0.03 | NA N |
| C8 | 3045.48 | 3.421 | 3045.29 | 3.421 | 0.01 | 0.00 | atek Napore |
| otel C9 | 3045.16 | 3.426 | 3045.16 | 3.426 | 0.00 | 0.00 | no N stek |
| C10 | 3049.71 | 3.416 | 3049.71 | 3.416 | 0.00 | 0.00 | aboter N Ando |

T.2 Thermal test 热测试

| No. | Pre-test | 测试前 | After tes | t 测试后 | Mass | Voltage | Whether leakage, |
|--------|----------|---------|-----------|---------|------------|---------|---------------------|
| 编号 | Mass | Voltage | Mass | Voltage | loss | Loss | venting, |
| rek | 质量 | 电压 | 质量 | 电压 | 质量亏损 | 电压亏损 | disassembly, |
| DO. D. | 克(g) | 伏(V) | 克(g) | 伏(V) | (%) | (%) | rupture, fire (Y/N) |
| hotek | Anbo | Arek | upote | And | | hotek | 有无渗漏,排气,解 |
| Dur | hotek | Anbo. | la. | rek or | bote | YUR | 体,破裂和起火(是 |
| Mpore | And | 100% | ek Aup | D. W. | rek | Anbore | /否) |
| C1 vel | 3050.72 | 3.431 | 3050.25 | 3.417 | 0.02 | 0.41 | Whoold Will |
| C2 | 3046.35 | 3.419 | 3045.83 | 3.407 | 0.02 | 0.35 | Net an |
| C3 Not | 3048.68 | 3.423 | 3048.19 | 3.412 | 0.02 | 0.32 | e, Vuy |
| C4 | 3048.37 | 3.416 | 3047.85 | 3.404 | 0.02 | 0.35 | rek Note |
| C5 AN | 3047.15 | 3.422 | 3046.64 | 3.411 | 0.02 | 0.32 | o N Rek |
| C6 | 3048.16 | 3.432 | 3047.65 | 3.419 | 0.02 | 0.38 | botek N Anbo |
| C7 | 3049.44 | 3.418 | 3048.95 | 3.405 | 0.02 | 0.38 | Arrange N shoter |
| C8 | 3045.29 | 3.421 | 3044.79 | 3.411 | 0.02 | 0.29 | Wpose N VIII |
| C9 | 3045.16 | 3.426 | 3044.66 | 3.415 | 0.02 | 0.32 | odeN Anbos |
| C10 | 3049.71 | 3.416 | 3049.23 | 3.403 | 0.02 | 0.38 | And N |





Page 12 of 16 报告编号 12 页 共 16 页

T.3 Vibration 振动

| No. | Pre-test | 测试前 | After tes | t 测试后 | Mass | Voltage | Whether leakage, |
|----------|----------|---------|-----------|---------|--------|---------|---------------------|
| 编号 | Mass | Voltage | Mass | Voltage | loss | Loss | venting, |
| VII. | 质量 | 电压 | 质量 | 电压 | 质量亏损 | 电压亏损 | disassembly, |
| Aupo, | 克(g) | 伏(V) | 克(g) | 伏(V) | (%) | (%) | rupture, fire (Y/N) |
| hote | Anbo | 7,000 | otek () | anbote. | And | note | 有无渗漏,排气,解 |
| Ann | ak. | potek l | upo. | K. Stek | anbore | Ans | 体,破裂和起火(是 |
| day Yst | Die. Du | 40. | botek | Aupo | K. 0 | ek ant | /否) |
| C1 | 3050.25 | 3.417 | 3050.25 | 3.417 | 0.00 | 0.00 | Lotek Nanbore |
| C2 | 3045.83 | 3.407 | 3045.83 | 3.407 | 0.00 | 0.00 | rup, K N, Potek |
| C3 | 3048.19 | 3.412 | 3048.19 | 3.412 | 0.00 | 0.00 | abote. N And |
| C4 | 3047.85 | 3.404 | 3047.68 | 3.403 | 0.01 | 0.03 | TreW anbore |
| C5 | 3046.64 | 3.411 | 3046.64 | 3.411 | 0.00 | 0.00 | Aupo N |
| C6 | 3047.65 | 3.419 | 3047.49 | 3.418 | 0.01 | 0.03 | L bolk Anb |
| C7 | 3048.95 | 3.405 | 3048.95 | 3.405 | 0.00 | 0.00 | M. N. OK |
| C8 | 3044.79 | 3.411 | 3044.79 | 3.411 | 0.00 | 0.00 | rick More |
| C9 Marie | 3044.66 | 3.415 | 3044.66 | 3.414 | 0.00 | 0.03 | N notek |
| C10 | 3049.23 | 3.403 | 3049.23 | 3.403 | 0.00 | 0.00 | botes Nano |

T.4 Shock 冲击

Peak acceleration: 50 g_n , Pulse duration: 11 ms 峰值加速度: 50 g_n , 脉冲时间: 11 ms

| | | | | | | | | - V |
|-----|---------|--------------|---------|----------------|---------|---------|---------|---------------------|
| , | No. | Pre-test 测试前 | | After test 测试后 | | Mass | Voltage | Whether leakage, |
| 0 | 编号 | Mass | Voltage | Mass | Voltage | loss | Loss | venting, |
| 100 | · ak | 质量 | 电压 | 质量 | 电压。 | 质量亏损 | 电压亏损 | disassembly, |
| 0 | uport | 克(g) | 伏(V) | 克(g) | 伏(V) | (%) | (%) | rupture, fire (Y/N) |
| | Anbotek | Anbo | Dr. | ek ab | oten Ar | lo- | botek | 有无渗漏,排气,解 |
| | AND | hotel | | b. | -xek | aporeis | AMO | 体,破裂和起火(是 |
| | "Upote" | AUR | . × | otek p | upo, | A. rek | anbore | /否) |
| | C1 | 3050.25 | 3.417 | 3050.25 | 3.417 | 0.00 | 0.00 | ek Whis be |
| SA | C2 | 3045.83 | 3.407 | 3045.83 | 3.407 | 0.00 | 0.00 | N N N |
| | C3 | 3048.19 | 3.412 | 3048.01 | 3.411 | 0.01 | 0.03 | ooter Noo |
| oc | C4 | 3047.68 | 3.403 | 3047.68 | 3.403 | 0.00 | 0.00 | ek N aboter |
| | C5 | 3046.64 | 3.411 | 3046.64 | 3.411 | 0.00 | 0.00 | Aupo, N by |
| P | C6 | 3047.49 | 3.418 | 3047.49 | 3.418 | 0.00 | 0.00 | hotek N Anbo. |
| | C7 | 3048.95 | 3.405 | 3048.95 | 3.405 | 0.00 | 0.00 | Ans N hot |
| | C8 | 3044.79 | 3.411 | 3044.79 | 3.411 | 0.00 | 0.00 | anborn Ans |
| | C9 | 3044.66 | 3.414 | 3044.48 | 3.414 | 0.01 | 0.00 | Net on |
| Y. | C10 | 3049.23 | 3.403 | 3049.23 | 3.402 | 0.00 | 0.03 | ArroN |





报告编号

Page 13 of 16 第 13 页 共 16 页

T.5 External short circuit 外部短路

| -100 | |
|-----------------------|--|
| Peak temperature (°C) | Whether disassembly, rupture, fire (Y/N) |
| 最高温度 | 有无解体,破裂,起火(是/否) |
| 84.1 | Anbor And And And |
| 83.6 | k hotek AnboN atek ant |
| 84.4 | And tak Wiek Ando |
| 85.3 | otek Anbo, AN tek upoter |
| 86.0 | ok hotek Nabo |
| 85.7 | Anbore Ans Lek N shorter Anbo |
| 87.4 | N Andore N And sek above |
| 85.8 | And k hotek N Anbo. An |
| Anbo 87.0 | Anbore And N borek Anbo |
| 86.4 | notek Anborn An- |
| | 最高温度 84.1 83.6 84.4 85.3 86.0 85.7 87.4 85.8 |

T.6 Crush 挤压

| No. 编号 | Peak temperature (°C) 最高温度 | Whether disassembly, fire (Y/N) 有无解体,起火(是/否) |
|---------|-------------------------------|---|
| C11 | 22.6 | Anbor N An tek abore |
| C12 | 22.7 | And ak borry Anbor Ar |
| C13 | 22.5 | Anbore And Nok hotek Anbi |
| C14 | 22.8 | Tek out No And |
| C15 | 22.7 | ster Anbo N stek Anbore A |
| C16 | 22.8 | Not abover Not |
| C17 And | 22.6 | upor An sek N spores And |
| C18 | 22.6 | Potek Aupor N W. *ek upoter |
| C19 | 22.8 | And the hotek N Andor A. tek |
| C20 C20 | 22.8 | anbore Ant IN hotek Anbo. |



报告编号

Page 14 of 16 第 14 页 共 16 页

T.8 Forced discharge 强制放电

| 46, | 200 | | No. | -Mo. | by. | | 46, | 000 | | 100 |
|---------|------------|----------|----------------------|----------|----------|-------------------------------|------------|----------|----------|--------|
| loo rel | No. 编号 | Jotek . | Anbore | Arra | Whether | disassei | mbly, fire | (Y/N) | abotek | Anbore |
| Pupor | C21 | rek | Vupolei | And | 有无 | 解体,起 ₂ N | 火(是/香 | î) | , otek | nbot |
| abo | C21 | Yupo, | hotel | Aupo, | Ko. | N N | | potek | Aupo | K 1 |
| by | C23 | Aupote | AUD | rek | botok | Pupol4 | Λ by. | "O'lek | Anbore | - Pu |
| P. | C24 | , hot | ek Anbe |), by | riek | N _C N ^C | 161 | Auba | '0' | otek |
| sk. | C25 | Dur | rek. | abotek | AUPO | N | rotek | Anbore | Die | *ek |
| 40- | C26 | K An | 00. b | rek | anbott | N | Up. | - Jo | rek A | 'upo. |
| port | C27 | Yer | poier | Aupo | | orek N | Auport | VI | -tek | poter |
| botek | C28 | 0, | H. Otek | anbore. | Vu, | N | 100% | ek p | upo. | ly, |
| VII. | C29 | apoiek | AUDO | , ho | ek | Pupose, N | VIII | *ek | "Upolek | Aupo |
| AUPO | C30 | , otek | Vupo _{ter.} | And | No. | N- | PU. | bo, | h. otek | 0.04 |
| ~ < | C31 C32 | Anbe | K 20 | tek Anl | 00,0 | Ano N | ,ek | AUPOJEK | Anbo | 4 |
| N. | C32 | Anbois | AUI. | *ek | - spotek | N | V. | w. Polek | Anbo | |
| | C34 | | otek Ar | 1001 | Di. | N | poyer | PUDDA | . No. | -botek |
| otek | C35 | P.C. | rek | anbotel. | PUPP | N N | hotek | Aupo | μ. | rek |
| yo. | C36 | rek | Yupo, | i otek | Anb | N | YU. | ,K | botek | Aupo. |
| VUPO. | C37 | rek | "poter | AUR | K | notek N | Vupo, | be | rek | nporte |
| roda. | C38 | Upo. | in notek | Anbore | P | N | \ | otek | Aupo | In. |
| Di. | C39 | - upoter | Anbe | -V | otek | N _{ool} N | Dir. | nek | - upoter | AUD |
| an | C40 | r | k abot | VU. | | N | SIL | YUPO. | lu. | ek. |




报告编号

Page 15 of 16 第 15 页 共

9. PHOTOS OF THE SAMPLE 样品照片

Cell 电芯







报告编号

Page 16 of 16 第 16 页 共 16 页

DECLARATION

声明

 United Nations Recommendations On The Transport Of Dangerous Goods, Manual Of Tests And Criteria(ST/SG/AC.10/11/Rev.7).

《联合国关于危险货物运输的建议书—试验和标准手册》(ST/SG/AC.10/11/Rev.7)

2. Test place Lab: Shenzhen Anbotek Compliance Laboratory Limited
Address: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street,
Bao'an District, Shenzhen, Guangdong, China

测试实验室: 深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋4楼东

3. This report shall not be revised and deleted.

本报告不能修改和删除。

- 4. The test results presented in this report are only relevant to the test sample. 本报告出现的试验结果仅与试验样品有关。
- This report shall not be published as advertisement without the approval of Shenzhen Anbotek Compliance Laboratory Limited.

本报告在未经深圳安博检测股份有限公司书面许可情况下不能用于宣传、广告之用。

6. This report shall not be copied partly without the written approval of Shenzhen Anbotek Compliance Laboratory Limited.

除非全部复制,否则无深圳安博检测股份有限公司书面批准本报告不得部分复制。

-- End of report --

-- 报告结束 --

