



The correct place to install the screw to the battery

the screw is too long to open the anti explosion valve

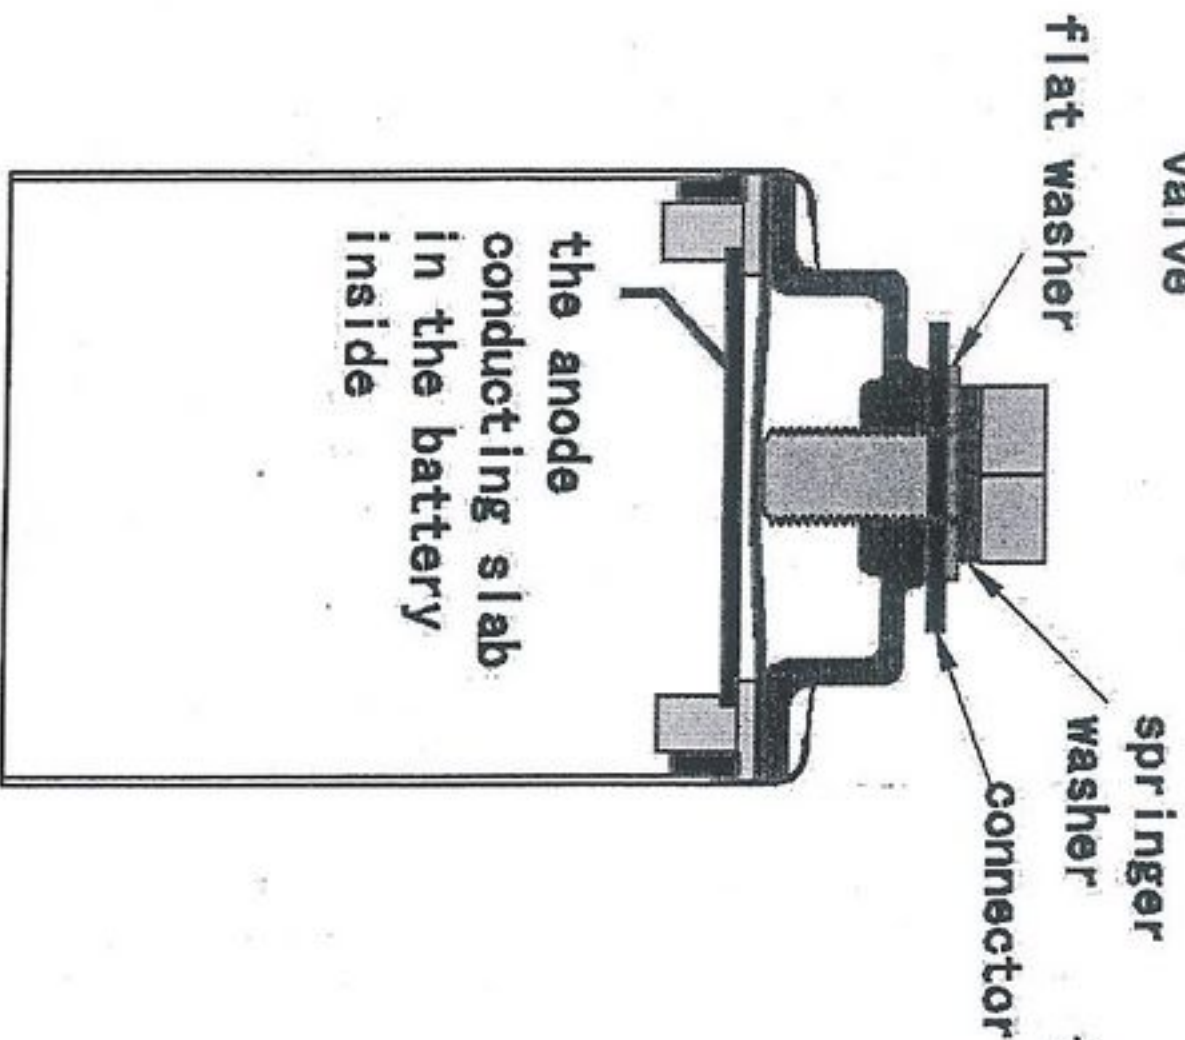


Picture1

the normal anti explosion valve place

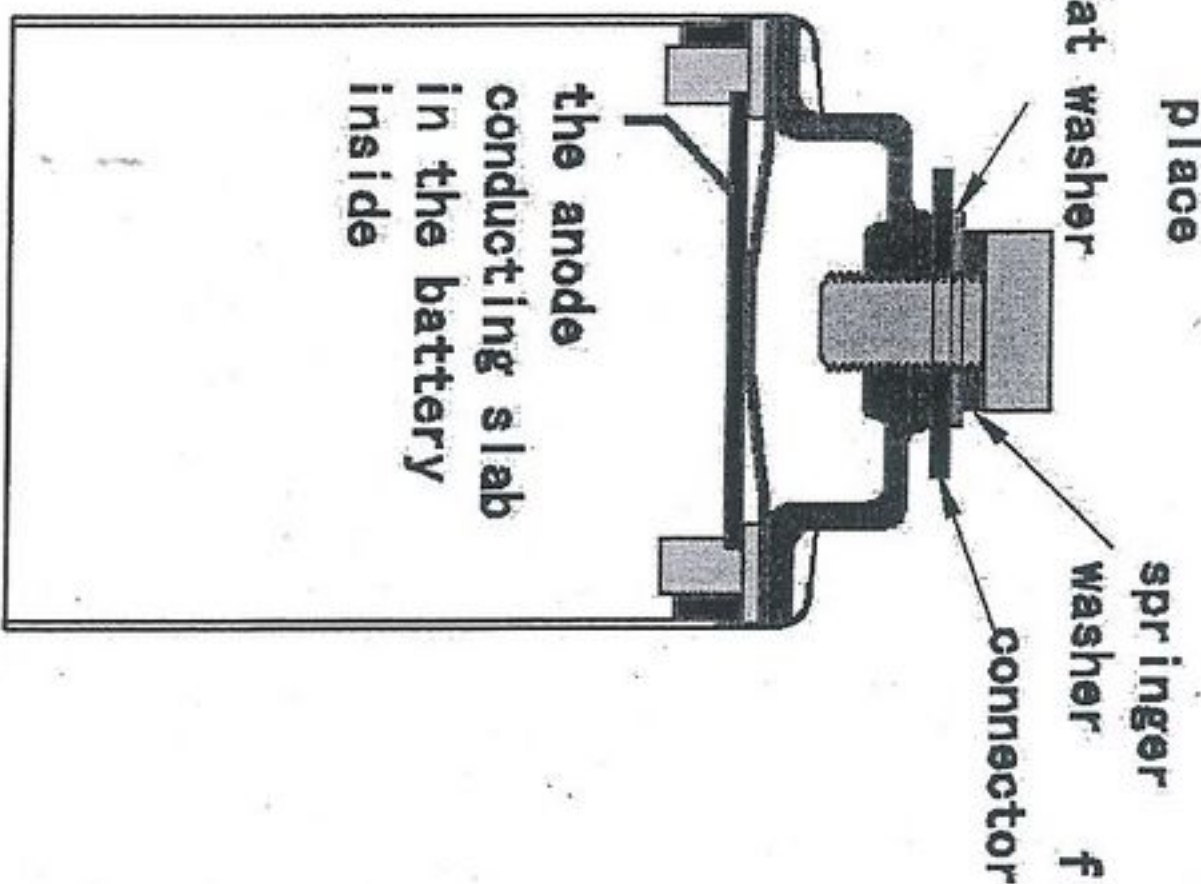

Picture2

the normal anti explosion valve place to open

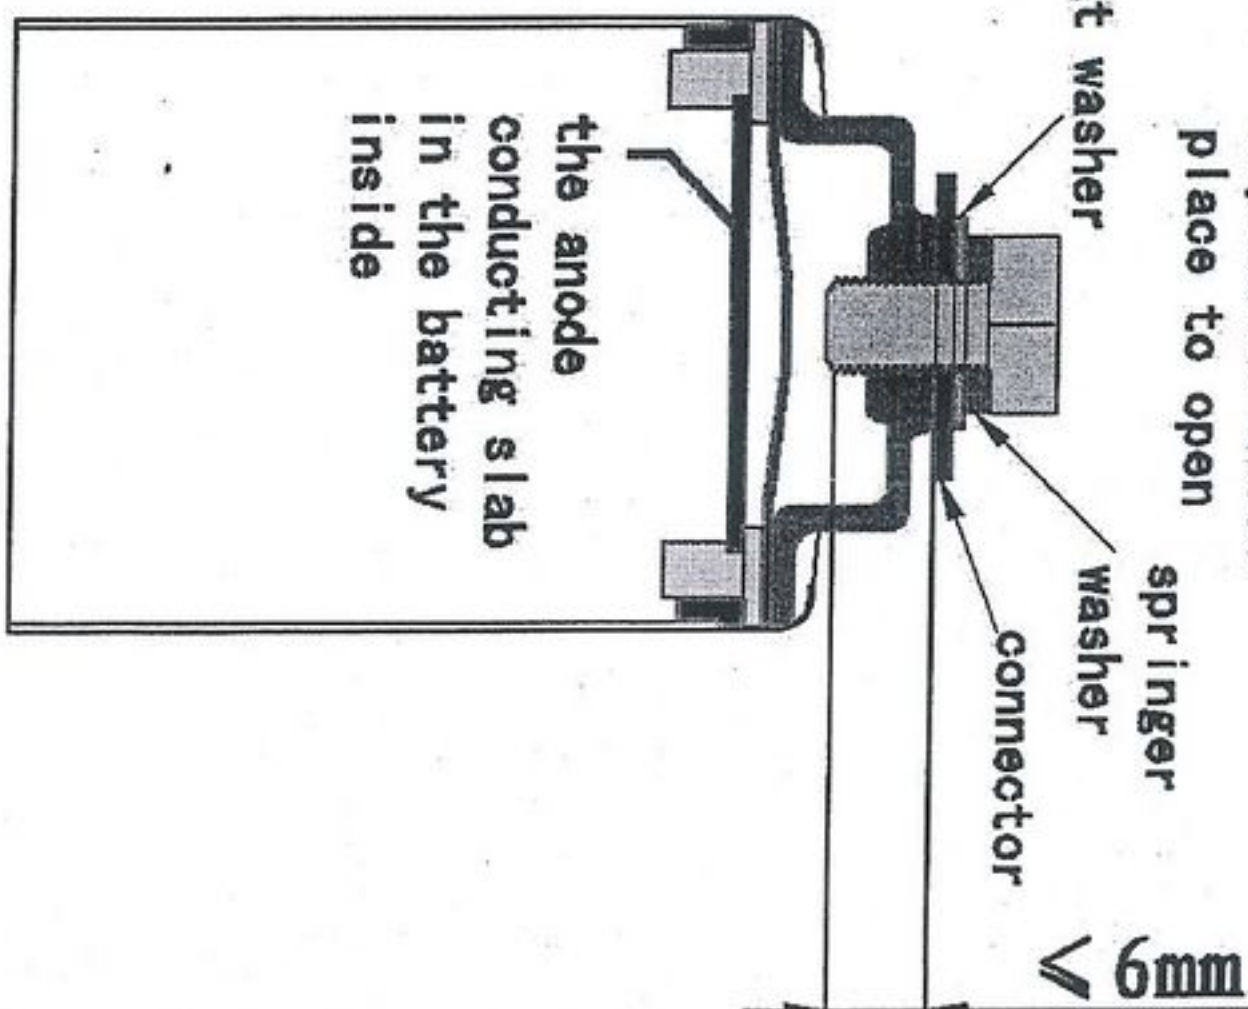

Picture3

Illustration: the S battery which produced by our company have the following points. the screw install on the anode is connect with with the anti explosion valve. when the customer assemle the battery, please do not use the screw too long, otherwise, it will damage the anti explosion valve and its function. causing the battery damage and safety issue as the pictur1. the correct ways to install is like the pictur2 and 3. we suggest to use the screw which we offer. 2. please use our screw and pad, only can use the 3N.M torque to twist tighten the screw. the Max. torque can not more than 4N.M otherwise the battery will be damaged